

Icon46

TFT-LCD Indoor with stand

General information

Outline dimensions, mm	702 X 1158 X 152
Weight, kg	90
Temperature range (ambient)	0°C - +30°C
Panel (BLU) lifetime, hrs	50 000
Power consumption, W	400
Continuous use	24/7
Bodywork	Aluminium/steel
Protection	Aluminium cover Laminated/tempered front glass, thickness 6 mm Self-protected electronics if outside temperature range IP30 protected casing

TFT-LCD display

Active area, mm	576 X 1018
Resolution, pixels	1920 X 1080
Brightness, cd/m ²	500
Viewing angle	85/85/85/85
Response time, ms	8

Integrated PC

Motherboard	M-ATX, Flex-ATX
Processor	1GHz+
DRAM	512Mb+
Hard disk	80Gb+
Network	LAN

Mounting possibilities

	Portrait	Landscape
Free standing	X	X
Wall mounting	X	X
Flag mounting	X	X
Ceiling	X	X
Doublesided	X	X

Optional

Network connections	GPRS, WLAN
Mounting brackets	Wall, ceiling, leg
Video & Computer input (NO PC)	VGA, DVI, RGB
Integrated PC expansions on request	



Icon46

TFT-LCD Indoor

General information

Outline dimensions, mm	702 X 1158 X 152
Weight, kg	60
Temperature range (ambient)	0°C - +30°C
Panel (BLU) lifetime, hrs	50 000
Power consumption, W	400
Continuous use	24/7
Bodywork	Aluminium/steel
Protection	Aluminium cover Laminated/tempered front glass, thickness 6 mm Self-protected electronics if outside temperature range IP30 protected casing

TFT-LCD display

Active area, mm	576 X 1018
Resolution, pixels	1920 X 1080
Brightness, cd/m ²	500
Viewing angle	85/85/85/85
Response time, ms	8

Integrated PC

Motherboard	M-ATX, Flex-ATX
Processor	1GHz+
DRAM	512Mb+
Hard disk	80Gb+
Network	LAN

Mounting possibilities

	Portrait	Landscape
Free standing	X	X
Wall mounting	X	X
Flag mounting	X	X
Ceiling	X	X
Doublesided	X	X

Optional

Network connections	GPRS, WLAN
Mounting brackets	Wall, ceiling, leg
Video & Computer input (NO PC)	VGA, DVI, RGB
Integrated PC expansions on request	



Icon46

TFT-LCD Outdoor with stand

General information

Outline dimensions, mm	677 X 1133 X 176
Weight, kg	152
Temperature range (ambient)	-40°C - +40°C
Panel (BLU) lifetime, hrs	50 000
Power consumption, W	400
Continuous use	24/7
Bodywork	Aluminium/steel
Protection	Aluminium cover Laminated/tempered front glass, thickness 6/8/12 mm Self-protected electronics if outside temperature range Electronically controlled heating and cooling devices Water and dust protected structure IP54/IP65 protected casing

TFT-LCD display

Active area, mm	576 X 1018
Resolution, pixels	1366 X 768
Brightness, cd/m ²	700
Viewing angle	90/90/90/90
Response time, ms	8

Integrated PC

Motherboard	M-ATX, Flex-ATX
Processor	1GHz+
DRAM	512Mb+
Hard disk	80Gb+
Network	LAN

Mounting possibilities

	Portrait	Landscape
Free standing	X	X
Wall mounting	X	X
Flag mounting	X	X
Ceiling	X	X
Doublesided	X	X

Optional

Network connections	GPRS, WLAN
Mounting brackets	Wall, ceiling, leg
Video & Computer input (NO PC)	VGA, DVI, RGB
Integrated PC expansions on request	



This specification is subject to change without prior notice.

Icon46

TFT-LCD Outdoor

General information

Outline dimensions, mm	677 X 1133 X 176
Weight, kg	122
Temperature range (ambient)	-40°C - +40°C
Panel (BLU) lifetime, hrs	50 000
Power consumption, W	400
Continuous use	24/7
Bodywork	Aluminium/steel
Protection	Aluminium cover Laminated/tempered front glass, thickness 6/8/12 mm Self-protected electronics if outside temperature range Electronically controlled heating and cooling devices Water and dust protected structure IP54/IP65 protected casing

TFT-LCD display

Active area, mm	576 X 1018
Resolution, pixels	1366 X 768
Brightness, cd/m ²	700
Viewing angle	90/90/90/90
Response time, ms	8

Integrated PC

Motherboard	M-ATX, Flex-ATX
Processor	1GHz+
DRAM	512Mb+
Hard disk	80Gb+
Network	LAN

Mounting possibilities

	Portrait	Landscape
Free standing	X	X
Wall mounting	X	X
Flag mounting	X	X
Ceiling	X	X
Doublesided	X	X

Optional

Network connections	GPRS, WLAN
Mounting brackets	Wall, ceiling, leg
Video & Computer input (NO PC)	VGA, DVI, RGB
Integrated PC expansions on request	



Icon57

TFT-LCD Indoor with stand

General information

Outline dimensions, mm	839 X 1403 X 152
Weight, kg	123
Temperature range (ambient)	0°C - +30°C
Panel (BLU) lifetime, hrs	50 000
Power consumption, W	500
Continuous use	24/7
Bodywork	Aluminium/steel
Protection	Aluminium cover Laminated/tempered front glass, thickness 6 mm Self-protected electronics if outside temperature range IP30 protected casing

TFT-LCD display

Active area, mm	705 X 1253
Resolution, pixels	1920 X 1080
Brightness, cd/m ²	500
Viewing angle	90/90/90/90
Response time, ms	8

Integrated PC

Motherboard	M-ATX, Flex-ATX
Processor	1GHz+
DRAM	512Mb+
Hard disk	80Gb+
Network	LAN

Mounting possibilities

	Portrait	Landscape
Free standing	X	X
Wall mounting	X	X
Flag mounting	X	X
Ceiling	X	X
Doublesided	X	X

Optional

Network connections	GPRS, WLAN
Mounting brackets	Wall, ceiling, leg
Video & Computer input (NO PC)	VGA, DVI, RGB
Integrated PC expansions on request	



This specification is subject to change without prior notice.

Icon57

TFT-LCD Indoor

General information

Outline dimensions, mm	839 X 1403 X 152
Weight, kg	85
Temperature range (ambient)	0°C - +30°C
Panel (BLU) lifetime, hrs	50 000
Power consumption, W	500
Continuous use	24/7
Bodywork	Aluminium/steel
Protection	Aluminium cover Laminated/tempered front glass, thickness 6 mm Self-protected electronics if outside temperature range IP30 protected casing

TFT-LCD display

Active area, mm	705 X 1253
Resolution, pixels	1920 X 1080
Brightness, cd/m ²	500
Viewing angle	90/90/90/90
Response time, ms	8

Integrated PC


Motherboard	M-ATX, Flex-ATX
Processor	1GHz+
DRAM	512Mb+
Hard disk	80Gb+
Network	LAN

Mounting possibilities

	Portrait	Landscape
Free standing	X	X
Wall mounting	X	X
Flag mounting	X	X
Ceiling	X	X
Doublesided	X	X

Optional

Network connections	GPRS, WLAN
Mounting brackets	Wall, ceiling, leg
Video & Computer input (NO PC)	VGA, DVI, RGB
Integrated PC expansions on request	

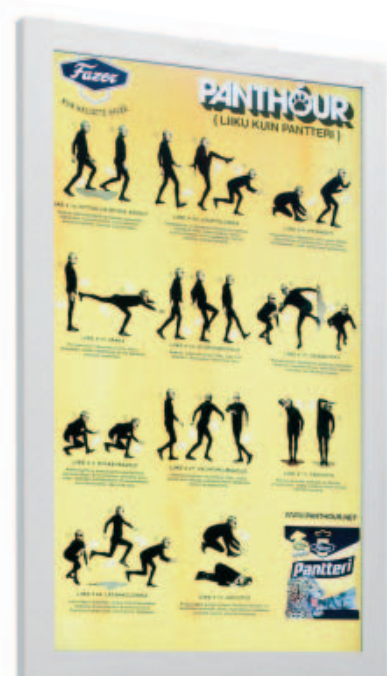

Icon57

TFT-LCD Outdoor with stand

General information

Outline dimensions, mm	840 X 1380 X 176
Weight, kg	202
Temperature range (ambient)	-40°C - +40°C
Panel (BLU) lifetime, hrs	50 000
Power consumption, W	500
Continuous use	24/7
Bodywork	Aluminium/steel
Protection	Aluminium cover Laminated/tempered front glass, thickness 6/8/12 mm Self-protected electronics if outside temperature range Electronically controlled heating and cooling devices Water and dust protected structure IP54/IP65 protected casing

TFT-LCD display

Active area, mm	705 X 1253
Resolution, pixels	1920 X 1080
Brightness, cd/m ²	500
Viewing angle	90/90/90/90
Response time, ms	8

Integrated PC

Motherboard	M-ATX, Flex-ATX
Processor	1GHz+
DRAM	512Mb+
Hard disk	80Gb+
Network	LAN

Mounting possibilities

	Portrait	Landscape
Free standing	X	X
Wall mounting	X	X
Flag mounting	X	X
Ceiling	X	X
Doublesided	X	X

Optional

Network connections	GPRS, WLAN
Mounting brackets	Wall, ceiling, leg
Video & Computer input (NO PC)	VGA, DVI, RGB
Integrated PC expansions on request	



Icon57

TFT-LCD Outdoor

General information

Outline dimensions, mm	840 X 1380 X 176
Weight, kg	164
Temperature range (ambient)	-40°C - +40°C
Panel (BLU) lifetime, hrs	50 000
Power consumption, W	500
Continuous use	24/7
Bodywork	Aluminium/steel
Protection	Aluminium cover Laminated/tempered front glass, thickness 6/8/12 mm Self-protected electronics if outside temperature range Electronically controlled heating and cooling devices Water and dust protected structure IP54/IP65 protected casing

TFT-LCD display

Active area, mm	705 X 1253
Resolution, pixels	1920 X 1080
Brightness, cd/m ²	500
Viewing angle	90/90/90/90
Response time, ms	8

Integrated PC

Motherboard	M-ATX, Flex-ATX
Processor	1GHz+
DRAM	512Mb+
Hard disk	80Gb+
Network	LAN

Mounting possibilities

	Portrait	Landscape
Free standing	X	X
Wall mounting	X	X
Flag mounting	X	X
Ceiling	X	X
Doublesided	X	X

Optional

Network connections	GPRS, WLAN
Mounting brackets	Wall, ceiling, leg
Video & Computer input (NO PC)	VGA, DVI, RGB
Integrated PC expansions on request	



Icon82

TFT-LCD Indoor

General information

Outline dimensions, mm	1208 X 2010 X 210
Weight, kg	425
Temperature range (ambient)	0°C - +30°C
Panel (BLU) lifetime, hrs	50 000
Power consumption, W	1 000
Continuous use	24/7
Bodywork	Aluminium/steel
Protection	Aluminium cover Laminated/tempered front glass, thickness 6 mm Self-protected electronics if outside temperature range IP30 protected casing

TFT-LCD display

Active area, mm	1016 X 1806
Resolution, pixels	1920 X 1080
Brightness, cd/m ²	600
Viewing angle	90/90/90/90
Response time, ms	8

Integrated PC

Motherboard	M-ATX, Flex-ATX
Processor	1GHz+
DRAM	512Mb+
Hard disk	80Gb+
Network	LAN

Mounting possibilities

	Portrait	Landscape
Free standing	X	X
Wall mounting	X	X
Flag mounting	X	X
Ceiling	X	X
Doublesided	X	X

Optional

Network connections	GPRS, WLAN
Mounting brackets	Wall, ceiling, leg
Video & Computer input (NO PC)	VGA, DVI, RGB
Integrated PC expansions on request	



Icon82

TFT-LCD Outdoor

General information

Outline dimensions, mm	1208 X 2010 X 210
Weight, kg	450
Temperature range (ambient)	-40°C - +40°C
Panel (BLU) lifetime, hrs	50 000
Power consumption, W	1 000
Continuous use	24/7
Bodywork	Aluminium/steel
Protection	Aluminium cover Laminated/tempered front glass, thickness 6/8/12 mm Self-protected electronics if outside temperature range Electronically controlled heating and cooling devices Water and dust protected structure IP54/IP65 protected casing

TFT-LCD display

Active area, mm	1016 X 1806
Resolution, pixels	1920 X 1080
Brightness, cd/m ²	600
Viewing angle	90/90/90/90
Response time, ms	8

Integrated PC

Motherboard	M-ATX, Flex-ATX
Processor	1GHz+
DRAM	512Mb+
Hard disk	80Gb+
Network	LAN

Mounting possibilities

	Portrait	Landscape
Free standing	X	X
Wall mounting	X	X
Flag mounting	X	X
Ceiling	X	X
Doublesided	X	X

Optional

Network connections	GPRS, WLAN
Mounting brackets	Wall, ceiling, leg
Video & Computer input (NO PC)	VGA, DVI, RGB
Integrated PC expansions on request	

